



TECHNICAL DATA

MASSES

Transport mass 54,000 lbs

DIMENSIONS

Transport length 50.20 ft
 Transport width 8.37 ft
 Transport height 10 ft
 Front ramp angle 12°
 Swing angle to left or right, max. 55°

MATERIAL HOPPER

Capacity 247 cu. ft.

PROPULSION

Operating speed, max 82 ft/min
 Transport speed, max 2.5 mph

ENGINE

Manufacturer/Model Cummins QSB 6.7-C220
 Rated power, SAE J1995 164 kW (220 hp) @ 2200 rpm
 Electrical system 24 V
 Emissions according to EU Stage III /EPA Tier 3
 Fuel tank capacity 79 gal

ENGINE

Manufacturer/Model Cummins B 6.7-C225
 Rated power, SAE J1995 168 kW (225 hp) @ 2200 rpm
 Electrical system 24 V
 Emissions according to EU Stage V /EPA Tier 4f
 Fuel tank capacity 95.11 gal

CONVEYOR



Conveyor type Rubber belt on two chains, mounted with metal stiffeners
 Conveyor speed Constantly variable
 Conveyor width 47.24 in
 Feeding height (max/min) 171.25 in /51.18 in
 Feed capacity 4000 t/h
 Feed capacity, optional swing conveyor 2000 t/h

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



DIMENSIONS

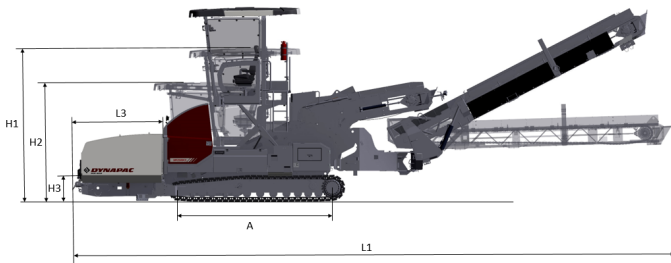

DIMENSIONS

A. Axle track	156.29 in
B1. Width, max.	100 in
B2. Width, standard	8 ft
B3. Width, center of tracks	82 in
C1. Track width	13 in
H1. Height, max.	196.85 in
H2. Height	157.48 in
H3. Height, transport	122.04 in
H4. Dumping height	20.86 in
L1. Length	602.36 in
L3. Length, hopper	88.58 in

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.